

SUPER JACKS



JJ Series 13,6 - 45,3 Tonnes




Models: JJA2515C & JJ3510D



Outdoor use and weld splatter can shorten the life of standard jacks. "We chose Simplex Super Jacks for the bullet proof construction and holding power."

FEATURES

- ✓ Ratcheting screw jack design.
- ✓ Holds the load indefinitely without creep down.
- ✓ Positive shoulder stop for safety.
- ✓ Available with aluminum or ductile iron housing.
- ✓ Ball bearings for smooth operation & low handle effort.

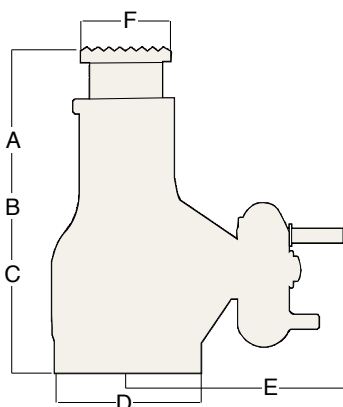

RECOMMENDED LEVER BAR LENGTHS

Please refer to page 17 for additional details.

Model	Tonnes	Length (mm)	Diameter (mm)
SLB36	13,6	914	25
SLB36	22,7	914	25
SLB36	31,8	914	25
SLB56	45,3	1422	29

Model	Jack Housing Material	Capacity (tonnes)	Dimensions (mm)						Handle Effort Per Tonne (N)	Weight (kg)
			A	B	C	D	E	F		
			Minimum Height	Maximum Height	Stroke	Base Diameter	Socket	Cap Diameter		
JJ2510C	Steel	22,7	261	387	127	138	191	79	27	19,5
JJ3510D		31,8	261	387	127	140	191	79	22	20
JJ5010B		45,3	262	363	102	184	224	100	18	36,3
JJA1510C	Aluminum	13,6	261	387	127	138	191	60	40	12,7
JJA2510C		22,7	261	387	127	138	191	79	27	15,4
JJA2515C		22,7	388	606	225	141	191	79	27	19,5
JJA3510D		31,8	261	387	127	138	191	79	22	15,4
JJA5010B		45,3	262	363	102	184	224	100	18	27,7