

HYDRAULIC ELECTRIC PUMPS (SOLENOID VALVE)




- ✓ Remote pendant controlled solenoid valves with up, down and emergency stop button.
- ✓ Internal safety valve set at 700 bar to prevent overpressure.
- ✓ External adjustable pressure relief valve.
- ✓ For use with single acting or double acting cylinders for heavy lifting or production applications.
- ✓ HBE series are supplied with the a 3 metres remote pendant as standard, with up, down and emergency stop button.

NOTE: Pressure gauge is not included.

AZ89
 Hydraulic Oil


P.85



HYDRAULIC POWERPACKS



Type

HBE


Capacity

5 - 25 litres

Max. pressure

700 bar

Capacity	A	B	C
litres	mm	mm	mm
5	370	230	500
8,5	390	310	525
12,5	410	390	550
25	470	360	670

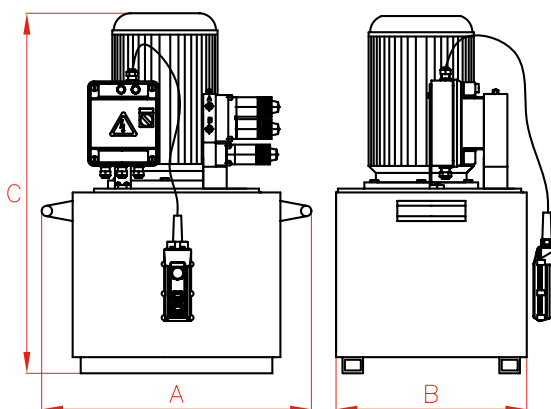

ELECTRIC PUMPS (SOLENOID VALVE)

Tank	Flow	Flow	230V-1ph-50Hz	400V-3ph-50/60Hz	Motor	Pump
Size	700 bar	50 bar	4/3	4/3	Power	Weight
litres	l/min	l/min	D/A	D/A	kW	kg
5	0,27	2,7	HBE2271	HBE2274	0,56	27
8,5	0,54	5,90	HBE3371	HBE3374	1,10	35
12,5	0,54	5,90	HBE3471	HBE3474	1,10	43
12,5	0,82	8,64	HBE4471	HBE4474	1,10	45
25	1,64	14,00	HBE5571	HBE5574	2,20	83

PUMP ACCESSORIES

**C** Roll Bar

- ✓ Protects pump and components: motor, valves, etc.
- ✓ For easy portability.
- ✓ Different sizes available.

**G** Glycerine Pressure Gauge

- ✓ $\pm 1,6\%$ full scale.
- ✓ Reliable pressure measurement.
- ✓ Pressure range: 0-1000 bar.